



FLEETRANNER™ STRAIGHT SILICONE TURBO CHARGER HOSE

PRODUCT TYPE: AIR AND DEFROSTER SYSTEMS

RECOMMENDED FOR: Turbo-charger and inter-cooler hose for passenger cars, trucks, buses, tractors and other industrial-type applications requiring straight connections. Easy to cut to size and to install.

RESISTANT TO: Oil and fuel residue contained within the turbo charging system.

CONSTRUCTION:

SHAPE: Straight

TUBE: FKM

REINFORCEMENT: Polyester


WIRE: -

COVER: Silicone




STANDARDS:

SAE NORM SAE J200

DIN NORM -

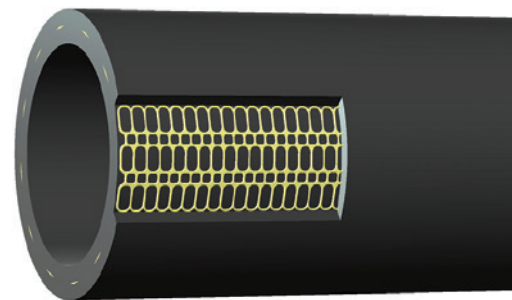

TEMPERATURE:



	PN							
		mm	"	mm	m	bar	bar	#
UTCH6X1	4177-30006	6	1/4	15	1	11.25	33.75	3
UTCH8X1	4177-30008	8	1/3	17	1	11.25	33.75	3
UTCH10X1	4177-30010	10	3/8	19	1	11.25	33.75	3
UTCH13X1	4177-30013	13	1/2	22	1	10.65	31.95	3
UTCH16X1	4177-30016	16	5/8	25	1	8.75	26.25	3
UTCH19X1	4177-30019	19	3/4	28	1	8.5	25.5	3
UTCH22X1	4177-30022	22	7/8	31	1	7.8	23.4	3
UTCH25X1	4177-30025	25	1	34	1	7.3	21.9	3
UTCH28X1	4177-30028	28	1 1/8	37	1	7.25	21.75	3
UTCH30X1	4177-30030	30	1 1/5	39	1	7.2	21.6	3
UTCH32X1	4177-30032	32	1 1/4	41	1	7.15	21.45	3
UTCH35X1	4177-30035	35	1 3/8	44	1	6.8	20.4	3
UTCH38X1	4177-30038	38	1 1/2	47	1	6.6	19.8	3
UTCH40X1	4177-30040	40	1 5/9	49	1	6.5	19.5	3
UTCH42X1	4177-30042	42	1 5/8	51	1	6.3	18.9	3
UTCH45X1	4177-30045	45	1 3/4	54	1	6	18	3
UTCH48X1	4177-30048	48	1 7/8	57	1	5.6	16.8	3
UTCH50X1	4177-30050	50	2	59	1	5	15	4
UTCH54X1	4177-30054	54	2 1/8	63	1	4.75	14.25	4
UTCH57X1	4177-30057	57	2 1/4	66	1	4.5	13.5	4
UTCH60X1	4177-30060	60	2 3/8	69	1	4.5	13.5	4
UTCH63X1	4177-30063	63	2 1/2	72	1	4.3	12.9	4
UTCH70X1	4177-30070	70	2 3/4	79	1	4.25	12.75	4
UTCH76X1	4177-30076	76	3	85	1	4	12	4
UTCH80X1	4177-30080	80	3 1/8	89	1	4	12	4
UTCH89X1	4177-30089	89	3 1/2	99	1	3.75	11.25	4
UTCH102X1	4177-30102	102	4	112	1	3.5	10.5	5